


Switch DS-3E0310HP-E

DS-3E0310HP-E 8 Port Fast Ethernet Unmanaged POE Switch

- Intelligent PoE Management
- Up to 300 m Long Range PoE Transmission
- IEEE 802.3bt Standard Hi-PoE, Max. 90 W for One Port
- 4/8-Core Adaptive Power Supply with Less Power Loss
- 6KV Surge Protection to Improve Reliability in Harsh Environment

Port Number	8 Port
Port speed	100mbp/s
PoE	PoE
PoE power	120 W
Type	Unmanaged

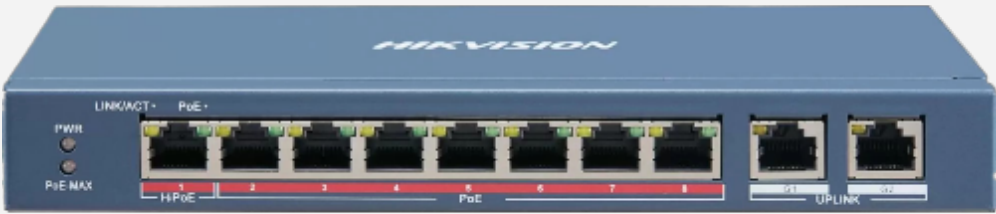

Detailed

Model	DS-3E0310HP-E
Power Supply	48 VDC, 2.5 A
Max. Power Consumption	120 W
Power Consumption in Idle	10 W
Installation Mode	Wall-Mounted,Desk-Mounted
Surge Protection	6 KV
Ports	Ports

MAC Address Table	8 K
Switching Capacity	5.60 Gbps
Packet Forwarding Rate	4.17 Mpps
Internal Cache	4 Mbits
PoE Standard	IEEE 802.3af,IEEE 802.3at,IEEE 802.3bt
PoE Power Pin	8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
Max. Port Power	Port 1: 90 W Ports 2 to 8: 30 W
PoE Port	Hi-PoE: Port 1 PoE: Ports 2 to 8
PoE Power Budget	110 W
Long Range	Ports 1 to 8: up to 300 m. Long range performance may vary depend on camera model or cable condition.
VIP Port	Ports 1 to 8: data on VIP ports is preferentially forwarded when bandwidth resources are insufficient.
EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU)