


Switch DS-3T0506P

DS-3T0506P HIKVISION No Adapter Unmanaged Industrial (-40°C,+75°C) POE switch 4x1000 Mbps, 2xGigabit SFP Uplink, 120W POE budget

- Full gigabit port
- The backplane bandwidth is 20 Gbps
- Supports PoE power supply and IEEE 802.3AF/AT standards.
- The maximum output power of each PoE port is 30 W.
- PoE management: PoE device detection and PoE power management
- Adopt redundant dual power input design
- Die cast aluminum alloy housing.
- No fan, -40 °C to 75 °C operating ambient temperature.
- MTBF ≥ 400,000 hours.

Port Number	4 Port
Port speed	1000mbp/s
PoE	PoE
PoE power	120 W
Type	Unmanaged

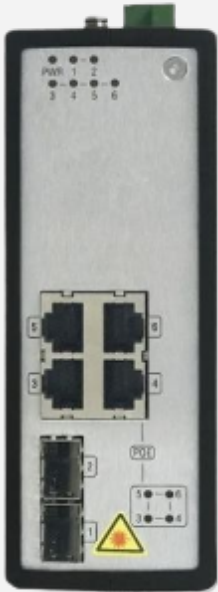

Detailed

Model	DS-3T0506P
Shell	Metal material, fan-free design
Operating Temperature	-40 °C to 75 °C (-40 °F to 167 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Max. Power Consumption	120 W
Power Consumption in Idle	10 W
Surge Protection	6 KV

Ports	4 × Gigabit RJ45 port,2 × Gigabit fiber optical port
MAC Address Table	4 K
Switching Capacity	20 Gbps
PoE Standard	IEEE 802.3af,IEEE 802.3at
PoE Power Pin	Mid-span: 1/2(+), 3/6(-)
Max. Port Power	30 W
PoE Port	PoE: Ports 3 to 6
PoE Power Budget	120 W
EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU)