


Switch DS-3T0510P

DS-3T0510P HIKVISION No Adapter Unmanaged Industrial (-40°C,+75°C) POE switch 8x1000 Mbps, 2xGigabit SFP Uplink, 240W POE budget

Full gigabit port
The backplane bandwidth is 20 Gbps.
Supports PoE power supply and IEEE 802.3AF/AT standards.
The maximum output power of each PoE port is 30 W.
PoE management: PoE device detection and PoE power management
Adopt redundant dual power input design
Die cast aluminum alloy housing.
No fan, -40 °C to 75 °C operating ambient temperature.
MTBF ≥ 400,000 hours.

Port Number	8 Port
Port speed	1000mbp/s
PoE	PoE
PoE power	250 W
Type	Unmanaged

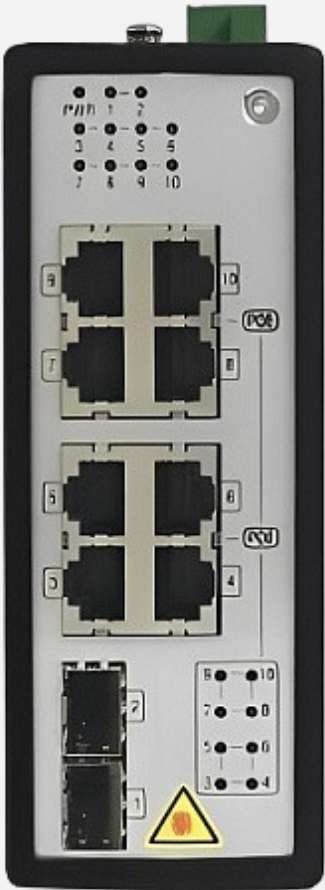

Detailed

Model	DS-3T0510P
Dimensions	52.0 mm x 140.0 mm x 110.0 mm
Shell	Metal Material, fan-free design
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	48VDC, 3.13A
Max. Power Consumption	250 W

Power Consumption in Idle	10 W
Installation Mode	Desk-Mounted
Surge Protection	6 KV
Ports	8 × Gigabit PoE port,2 × Gigabit fiber optical port
MAC Address Table	4 K
Switching Capacity	20 Gbps
PoE Standard	IEEE 802.3af,IEEE 802.3at
PoE Power Pin	End-span: 1/2(+), 3/6(-)
PoE Port	PoE: Ports 1 to 8
Max. Port Power	30 W
PoE Power Budget	240 W
EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU)