


Access Point EAP653

EAP653 AX3000 Ceiling Wi-Fi Access Point

- High speed: Up to 574 Mbps on 2.4 GHz and up to 2402 Mbps on 5 GHz, combined Wi-Fi speed up to 2976 Mbps
- Wi-Fi 6: More simultaneous connections at high speed
- Omada SDN: Centrally manage the entire network locally or via the cloud from the Omada web interface or app
- 160 MHz channels: twice as much data on one channel
- Seamless roaming: Video streaming and voice communication will stay on top even when users move
- Omada Mesh: Wireless communication between access points over a long distance for convenient placement
- PoE+ Support: Support PoE (802.3 at) for easy deployment and installation, as well as the ability to power from an outlet (adapter is purchased separately).
- Slim body: 160 × 33.6 mm

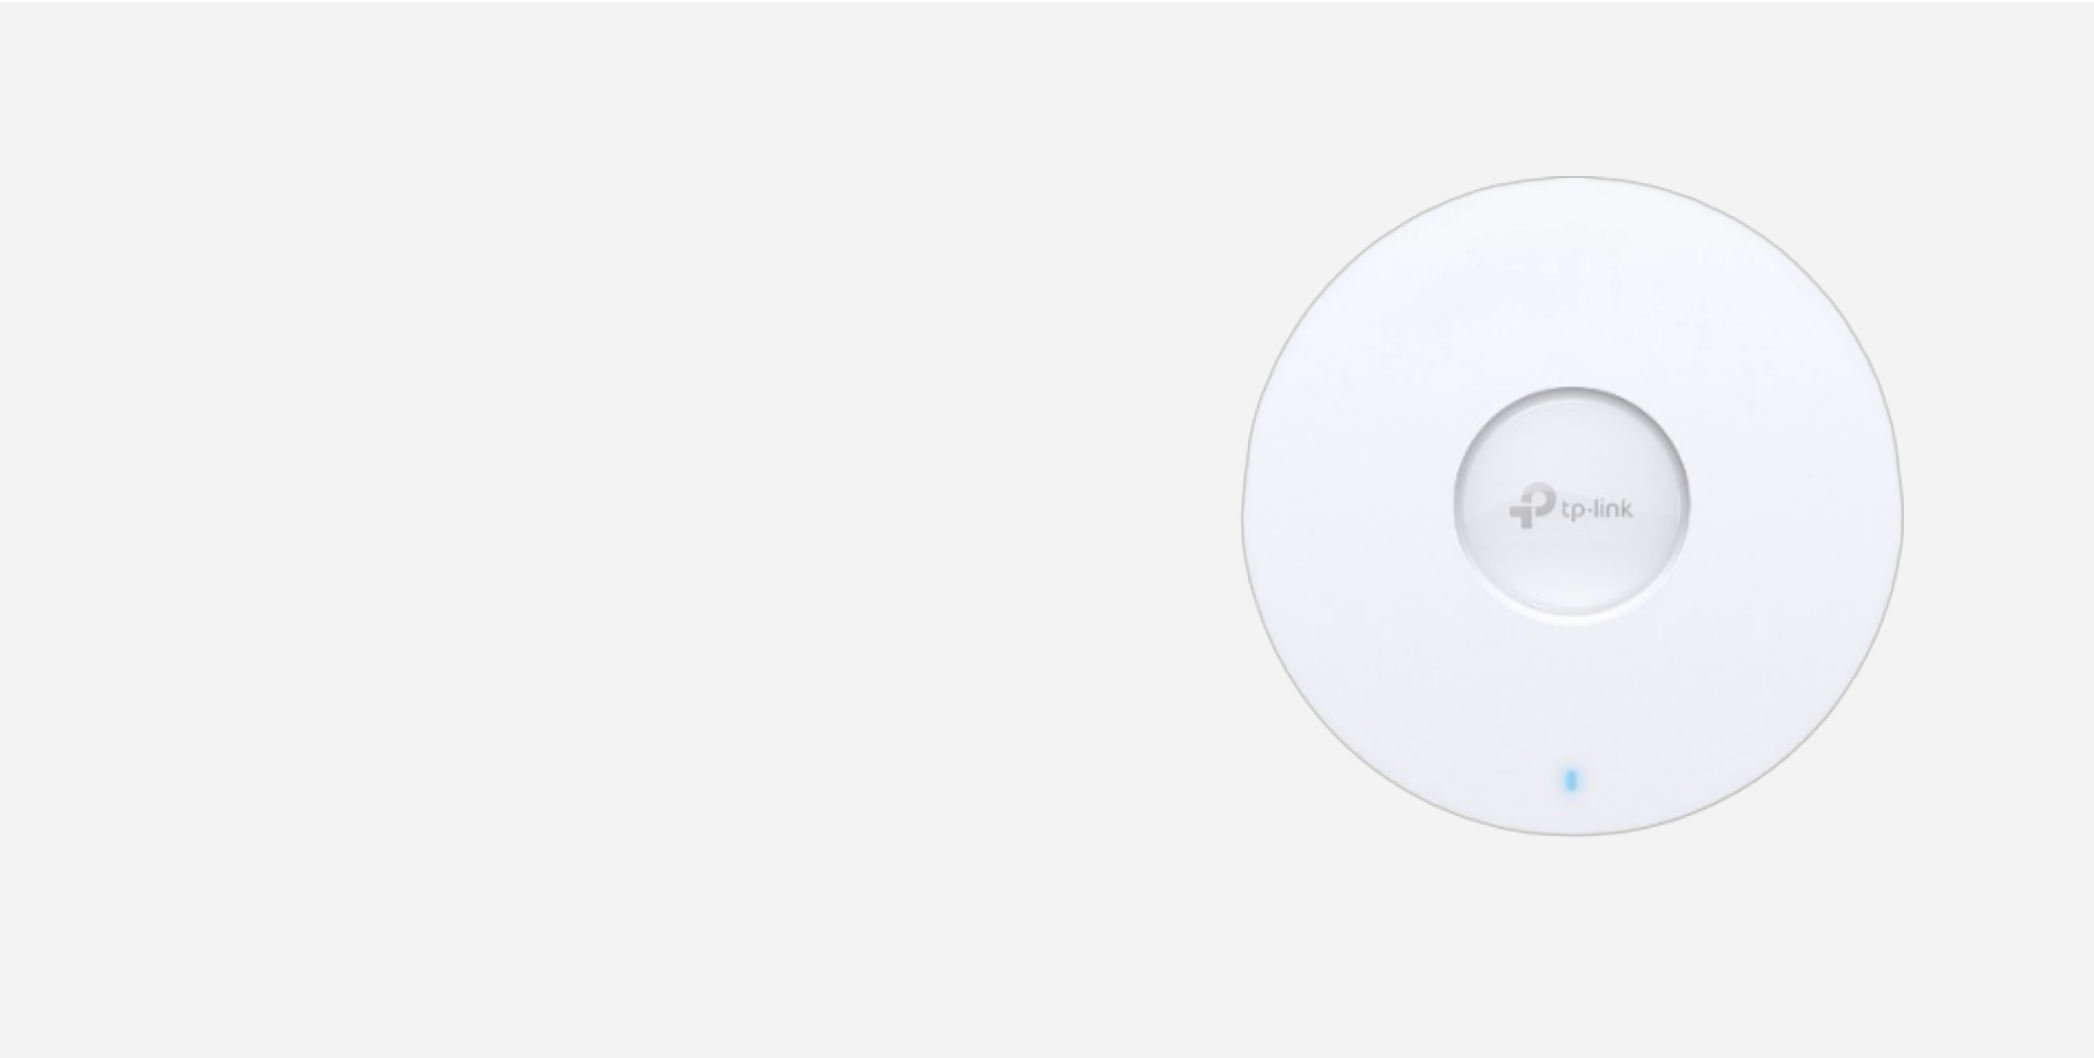

Ətraflı

Hardware Specifications	
Interfaces	Gigabit Ethernet RJ-45 port with PoE IEEE802.3at support
Buttons	Reset (reset settings)
Power supply	<div>* POE 802.3 at<ul style="list-style-type: none"><li>• DC12V / 1A</li><li>• Passive PoE 48V</li></ul></div> <div>The power adapter is not included in the package — it must be purchased separately.</div>
Power consumption	13.07 W

Dimensions (W × L × H)	160 × 160 × 33.6 mm
Type and / or number of antennas	Built-in Omni-directional: * 2.4 GHz: 4 dBi (2 pcs) • 5GHz: 5 dBi (2 pcs)
Placement	* Ceiling/wall mounting (mounting kit included) • Installation in the junction box
<b>Wi-Fi Settings</b>	
Maximum number of simultaneous Wi-Fi connections	250
Wi-Fi Standards	IEEE 802.11ax/ac/n/g/b/a
Frequency ranges	2.4 GHz and 5GHz
Transfer Rate	2.4 GHz: 2x2 MIMO, up to 574 Mbps 5 GHz: 2x2 MIMO, up to 2402 Mbp
Wi-Fi Features	<ul style="list-style-type: none"><li>• 1024-QAM</li><li>• OFDM symbol 4 times longer</li><li>• OFDMA</li><li>• Multiple SSIDs (up to 16 SSIDs, 8 for each frequency)</li><li>• Enabling / disabling wireless broadcasting</li><li>• Automatic channel assignment</li><li>• Transmission power control (in dBm)</li><li>• QoS (WMM)</li><li>• MU-MIMO</li><li>• HE160</li></ul> * Seamless roaming <ul style="list-style-type: none"><li>• Omada Mesh</li><li>• Band Steering</li><li>• Load Balancing</li><li>• Airtime Fairness</li><li>• Beamforming</li><li>• Speed Limiting</li><li>• Scheduled reboot</li><li>• Scheduled Wi-Fi</li><li>• Wi-Fi statistics for SSID / Access point / Client</li></ul>
Wi-Fi network Protection	* Authentication Portal <ul style="list-style-type: none"><li>• Access control</li><li>• MAC address filtering</li><li>• Isolating wireless clients</li><li>• Matching SSID - &gt; VLAN</li><li>• Detecting unauthorized access points</li><li>• 802.1 X Support</li><li>• WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise Encryption</li></ul>
Transmitter power	< 20 dBm or < 100 MW
<b>Management</b>	
The Omada App	Yes
Cloud access	Yes
Email notification	Yes
Managing indicators	Yes
SNMP	v1, v2c, v3
System Log	Local / Remote system Log

SSH	Yes
Web-based management interface	HTTP/HTTPS
Level 3 Management	Yes
Managing different locations	Yes
VLAN Management	Yes
Automatic configuration of parameters	Yes
<b>Other</b>	
Certification process	CE, FCC, RoHS
Scope of delivery	<ul style="list-style-type: none"><li>• Access point</li><li>• Ceiling or wall mount kit</li><li>• Installation guide</li></ul> <p>The power adapter is not included in the package — it must be purchased separately</p>
System requirements	Microsoft Windows XP, Vista, Windows 7, Windows 8, Windows 10, Linux
Environmental parameters	<ul style="list-style-type: none"><li>• Operating temperature: 0...+40 °C</li><li>• Storage temperature: -40...+70 °C</li><li>• Operating humidity: 10-90 % non-condensing</li><li>• Storage humidity: 5-90 % non-condensing</li></ul>