


Access Point EAP683

EAP683 AX6000 Ceiling Mount WiFi 6 Access Point

Up to 5952 Mbps WiFi 6 Speeds: 1148 Mbps on 2.4 GHz + 4804 Mbps on 5 GHz
 Ultra-range wireless coverage by 4×4 MIMO dual-band internal antennas with high transmission power
 Supports WiFi 6 technologies, such as HE160, 1024-QAM, etc
 Integrates with the Omada SDN platform for centralized management
 Advanced Features: Omada Mesh, Seamless Roaming, and more
 PoE+ Powered: Supports both 802.3at PoE+ and DC (adapter not included)

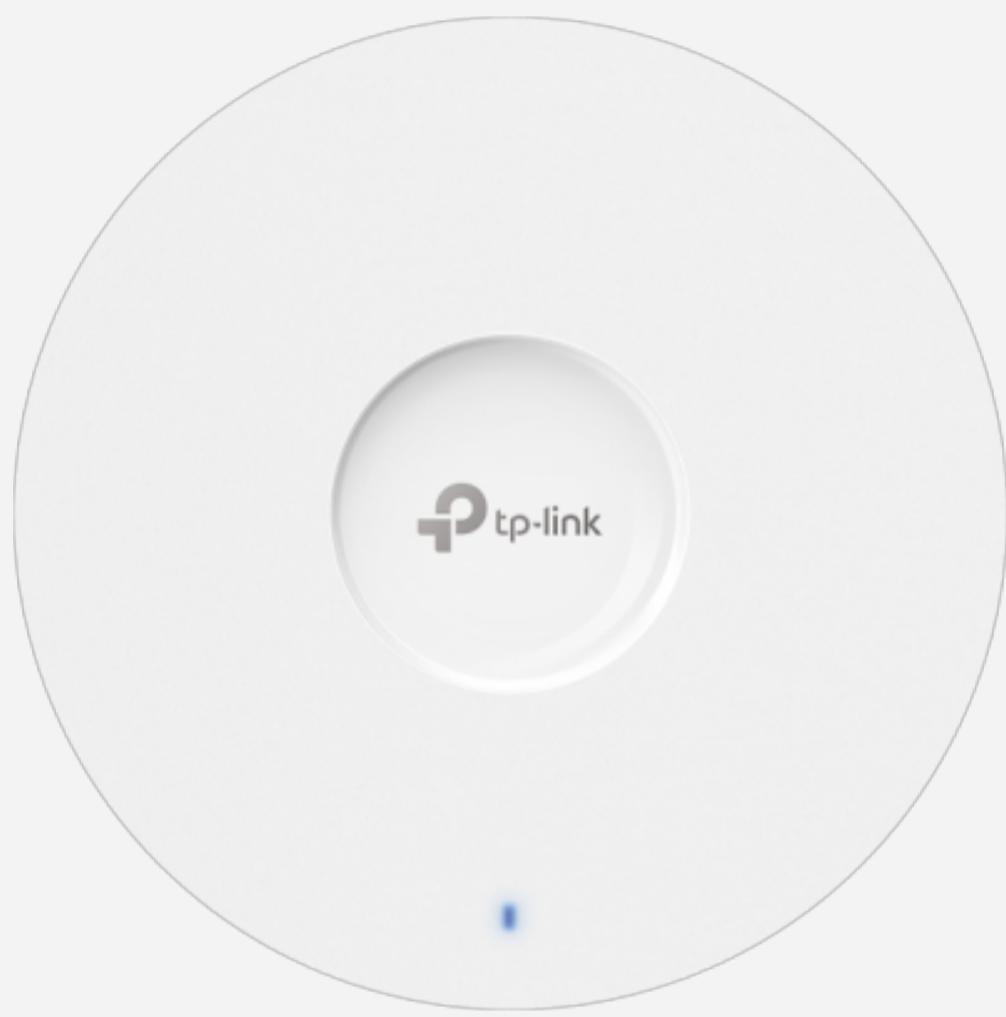

Detailed

HARDWARE FEATURES	
Interface	1× 2.5 Gigabit PoE+ Port
Button	Reset
Power Supply	<ul style="list-style-type: none"> • 802.3at PoE • 12 V / 2 A DC <p>Note: Power adapter is not included.</p>
Power Consumption	<ul style="list-style-type: none"> • EU: 20.43W • US: 23.69W
Dimensions (W x D x H)	8.7 × 8.7 × 1.3 in (220 × 220 × 32.5 mm)
Antenna Type	Internal Omni <ul style="list-style-type: none"> • 2.4 GHz: 4× 4 dBi

	<ul style="list-style-type: none"> • 5 GHz: 4× 5 dBi
Bluetooth	V5.2
Mounting	Ceiling /Wall Mounting (Kits included)

WIRELESS FEATURES	
Coverage	185m (2000ft ²)***
Concurrent Clients	510+**
Wireless Standards	IEEE 802.11ax/ac/n/g/b/a
Frequency	2.4 GHz and 5 GHz
Signal Rate	<ul style="list-style-type: none"> • 5 GHz: Up to 4804 Mbps • 2.4 GHz: Up to 1148 Mbps
Wireless Functions	<ul style="list-style-type: none"> • 1024-QAM • 4× Longer OFDM Symbol • OFDMA • Multiple SSIDs (Up to 16 SSIDs, 8 for each band) • Enable/Disable Wireless Radio • Automatic Channel Assignment • Transmit Power Control (Adjust Transmit Power on dBm) • QoS(WMM) • MU-MIMO (4×4 MU-MIMO DL&UL) • MIMO [4×4 (2.4G and 5G) MU-MIMO; 4×4 (2.4G and 5G) SU-MIMO] • HE160 (160 MHz Bandwidth)[‡] • Seamless Roaming(802.11k/v/r)[§] • Omada Mesh[§] • Band Steering • Load Balance • Airtime Fairness • Beamforming • Rate Limit • Reboot Schedule • Wireless Schedule • Wireless Statistics based on SSID/AP/Client
Wireless Security	<ul style="list-style-type: none"> • Captive Portal Authentication[§] • Access Control • Wireless Mac Address Filtering • Wireless Isolation Between Clients • SSID to VLAN Mapping • Rogue AP Detection • 802.1X Support • WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise
Transmission Power	<ul style="list-style-type: none"> • CE: • FCC:

MANAGEMENT	
Omada App	Yes
Centralized Management	<ul style="list-style-type: none"> • Omada Hardware Controller (OC300)

	<ul style="list-style-type: none"> • Omada Hardware Controller (OC200) • Omada Software Controller • Omada Cloud-Based Controller
Cloud Access	Yes. Require the use of OC300, OC200, Omada Cloud-Based Controller, or Omada Software Controller.
Email Alerts	Yes
LED ON/OFF Control	Yes
Management MAC Access Control	Yes
SNMP	v1, v2c, v3
System Logging Local/Remote Syslog	Local/Remote Syslog
SSH	Yes
Web-based Management	HTTP/HTTPS
L3 Management	Yes
Multi-site Management	Yes
Management VLAN	Yes
Zero-Touch Provisioning	Yes. Require the use of Omada Cloud-Based Controller.

OTHERS	
Certification	CE,FCC,RoHS
Package Contents	<ul style="list-style-type: none"> • EAP683 UR • Ceiling/Wall Mounting Kits • Installation Guide
System Requirements	Microsoft Windows XP, Vista, Windows 7, Windows 8, Windows10, Windows11, Linux
Environment	<ul style="list-style-type: none"> • Operating Temperature: 0-40 °C (32-104 °F) • Storage Temperature: -40-70 °C (-40-158 °F) • Operating Humidity: 10-90% RH non-condensing • Storage Humidity: 5-90% RH non-condensing