


## Wireless Sensor DS-PDBG8-EG2-WE

Wireless Sensor DS-PDBG8-EG2-WE

- High quality Omni-directional microphone sensor
- Fully remote configurable through APP
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected
- Frequency hopping against jamming for reliable transmission

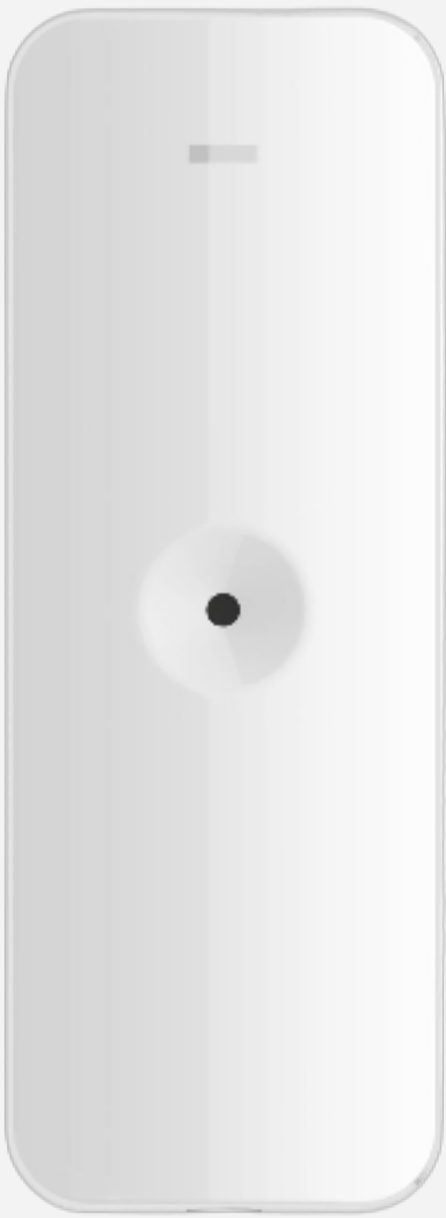

### Ətraflı

Detection Performance	
Detection Method	Acoustic Sensor
Detection Range	8m
Detection Angle	120°
Sensitivity	2m;4m;6m;8m
Glass Type	Float;Plate;Tampered;Wired;Laminated Leaded;Double Glazing
Glass Thickness	2.4 mm to 6.4 mm

Glass Size	0.3 m × 0.3 m to 3 m × 3 m
<b>Feature</b>	
Digital Processing	Support
Tamper Protection	Front;Rear
Environment Temperature Indicator	Support
Signal Strength Indicator	Support
<b>Interface</b>	
Alarm Input	Normally Closed;Normally Open;Impulse Count
Power Switch	Power up uenrolling
LED Indicator	Blue (alarm)
<b>Transmission</b>	
Transmission Technology	Tri-X Wireless
Transmission Method	Two-Way RF Wireless
Transmission Frequency	868MHz
Transmission Security	AES-128 Encryption
Transmission Range(Free Space)	1.6Km
Frequency Hopping	Support
Enrolling Method	Power up;Remote ID;QR Code
<b>Electrical Characteristics</b>	
Power Supply	Battery powered
Battery Type	CR123A × 2
Typical Voltage	3V
Standard Battery Life	Up to 5 years (standby time)
<b>General</b>	
Operation Temperature	-10°C to 55°C (14°F to 131°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Operation Humidity	10% to 90%
Dimension(WxHxD)	38.8 mm × 107.0 mm × 24.5 mm
Weight	83g
Mounting Method	Wall;Ceiling
Application Scenario	Indoor