


DS-PDEB1-EG2-WE(B) Panic Button

DS-PDEB1-EG2-WE(B) Simsiz panik düyməsi (Wireless Emergency Button)

- Effective emergency button
- Fully remote configurable through APP
- Multiple enrollment methods and easy installation design
- Frequency hopping against jamming for reliable transmission
- IP66 water proof

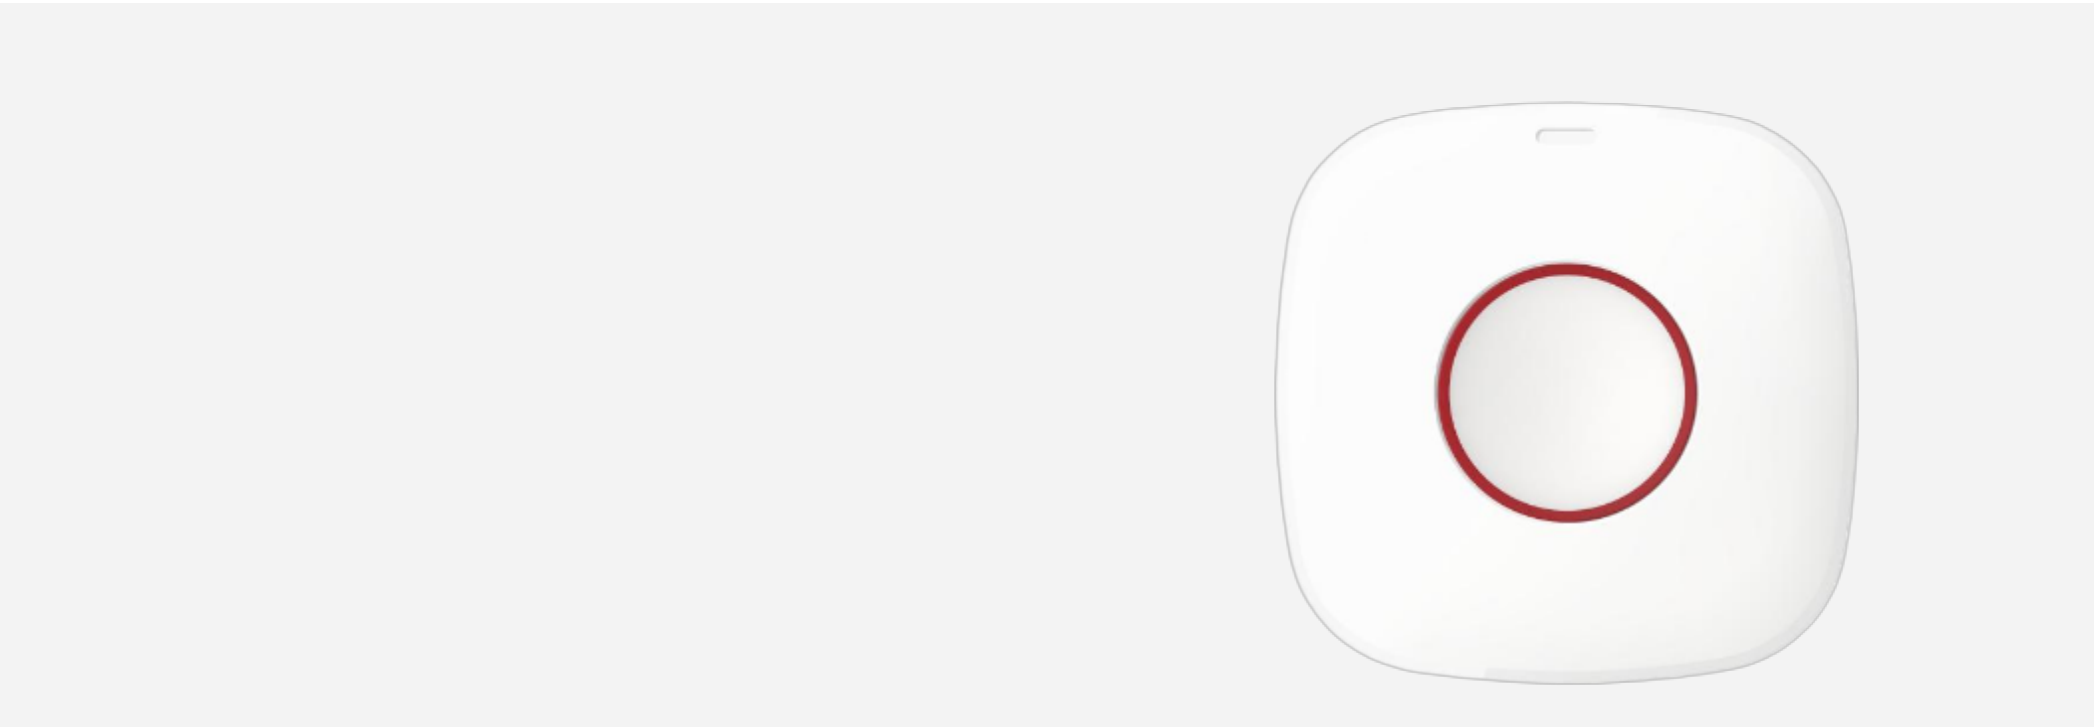

Ətraflı

Feature	
Button	1
Tamper Protection	Front;Rear
Environment Temperature Indicator	Support
Signal Strength Indicator	Support
Interface	
LED Indicator	Blue (alarm)
Transmission	
Transmission Technology	Tri-X Wireless
Transmission Method	Two-Way RF Wireless
Transmission Frequency	868MHz
Transmission Security	AES-128 Encryption
Transmission Range(Free Space)	1.2Km
Frequency Hopping	Support
Enrolling Method	Power up;Remote ID;QR Code
Electrical Characteristics	
Standard Battery Life	Up to 3 years (standby time)
Power Supply	Battery powered

Battery Type	CR2450 x 1
Typical Voltage	3V
General	
Operation Temperature	-10°C to 55°C (14°F to 131°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Operation Humidity	10% to 90%
IP Rate	IP66
Dimension(WxHxD)	63.8 mm × 63.8 mm × 18.4 mm
Weight	57.5 g
Mounting Method	Wall
Application Scenario	Indoor, Humid environment especially