


## SKY-6-DOME Ceiling Speaker

### SKY-6-DOME Ceiling Speaker

- 6' + 1' coaxial speaker. 20 W RMS@8  $\Omega$
- Protective dome type back cover
- Low profile aluminium grille
- Fast connection terminals and high conductivity. In junction box
- Anti-fall system for installation assistance

Power	20W
-------	-----

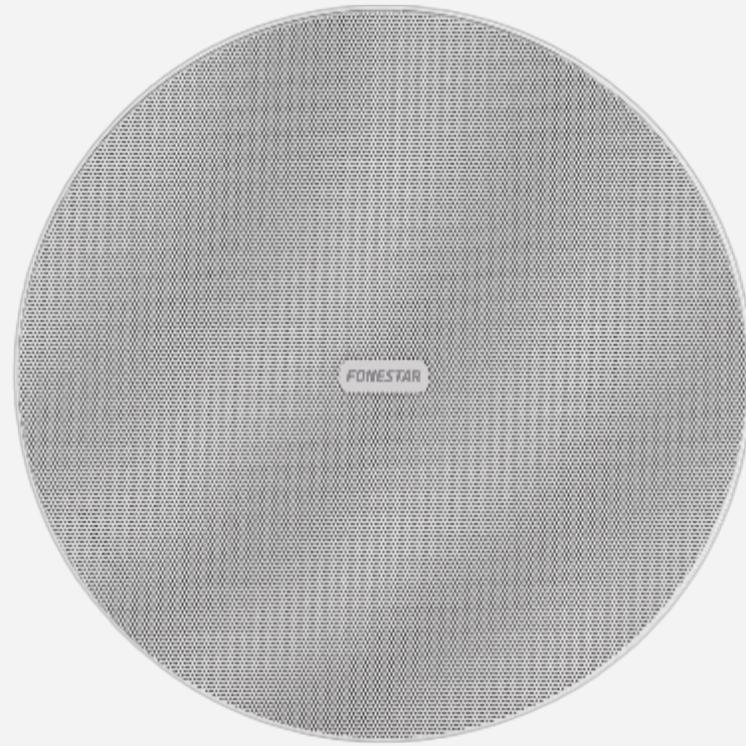

## Detailed

FEATURES:	Low impedance ceiling loudspeaker. Protective dome type back cover. Low profile frameless grille, constructed from rust resistant aluminium. Detachable, turn-lockable grille. The logo can be removed and painted. Fast connection terminals and high conductivity. Junction box in the rear cover with inlet and outlet port. Anti-fall system for installation assistance. Hook for safety cable. Stable, worm-gear ceiling brackets. Installation in ceilings with limited space. Protection against dust and water.
POWER:	20 W RMS 25 W MAX.
SPEAKER:	Coaxial speaker. 6' polypropylene woofer 1' adjustable tweeter
RESPONSE:	45-20,000 Hz @ -10 dB 60-20,000 Hz @ -3 dB
IMPEDANCE:	8 $\Omega$

SENSITIVITY:	90 dB @ 1 W/1 m
SOUND PRESSURE:	103 dB @ max. W/1m Continuous 106 dB @ max. W/1m Peak
COVERAGE ANGLE::	H/V (-6 dB): 125°@500Hz, 150°@1kHz, 60°@2kHz, 60°@4kHz
PROTECTIONS:	IP-65 in compliance with IEC 60529 EN ISO 9227:2006 Neutral Salt Spray Test
MATERIAL:	ABS (UV resistant) Liquid painted aluminium grille
CONNECTORS:	Highly conductive quick-connect terminals For cable cross-section 0.4 ~ 4 mm <sup>2</sup> . Junction box in back cover with inlet and outlet holes
OPERATION TEMPERATURE:	-20°C ~ 70°C (48 h)
STORAGE TEMPERATURE:	10°C ~ 40°C
MAXIMUM HUMIDITY:	95%
COLOUR:	White (RAL 9003)
DIMENSIONS:	Total loudspeaker: 249 mm Ø x 95 mm height Grille section: 5 mm Recessed height: 90 mm Installation hole: 219 mm Ø Maximum ceiling thickness: 30 mm
WEIGHT:	1.45 kg
ACCESSORIES:	Installation template