


HFA-2401-SC02 FO Patch Panel SM

Fiber Optic Patch panel 24 port SC fully loaded including: 24*SC Singlemode duplex adapter, 24*SC singlemode pigtail,0.9mm,1m 1*splicing tray, 24*fiber protection sleeve

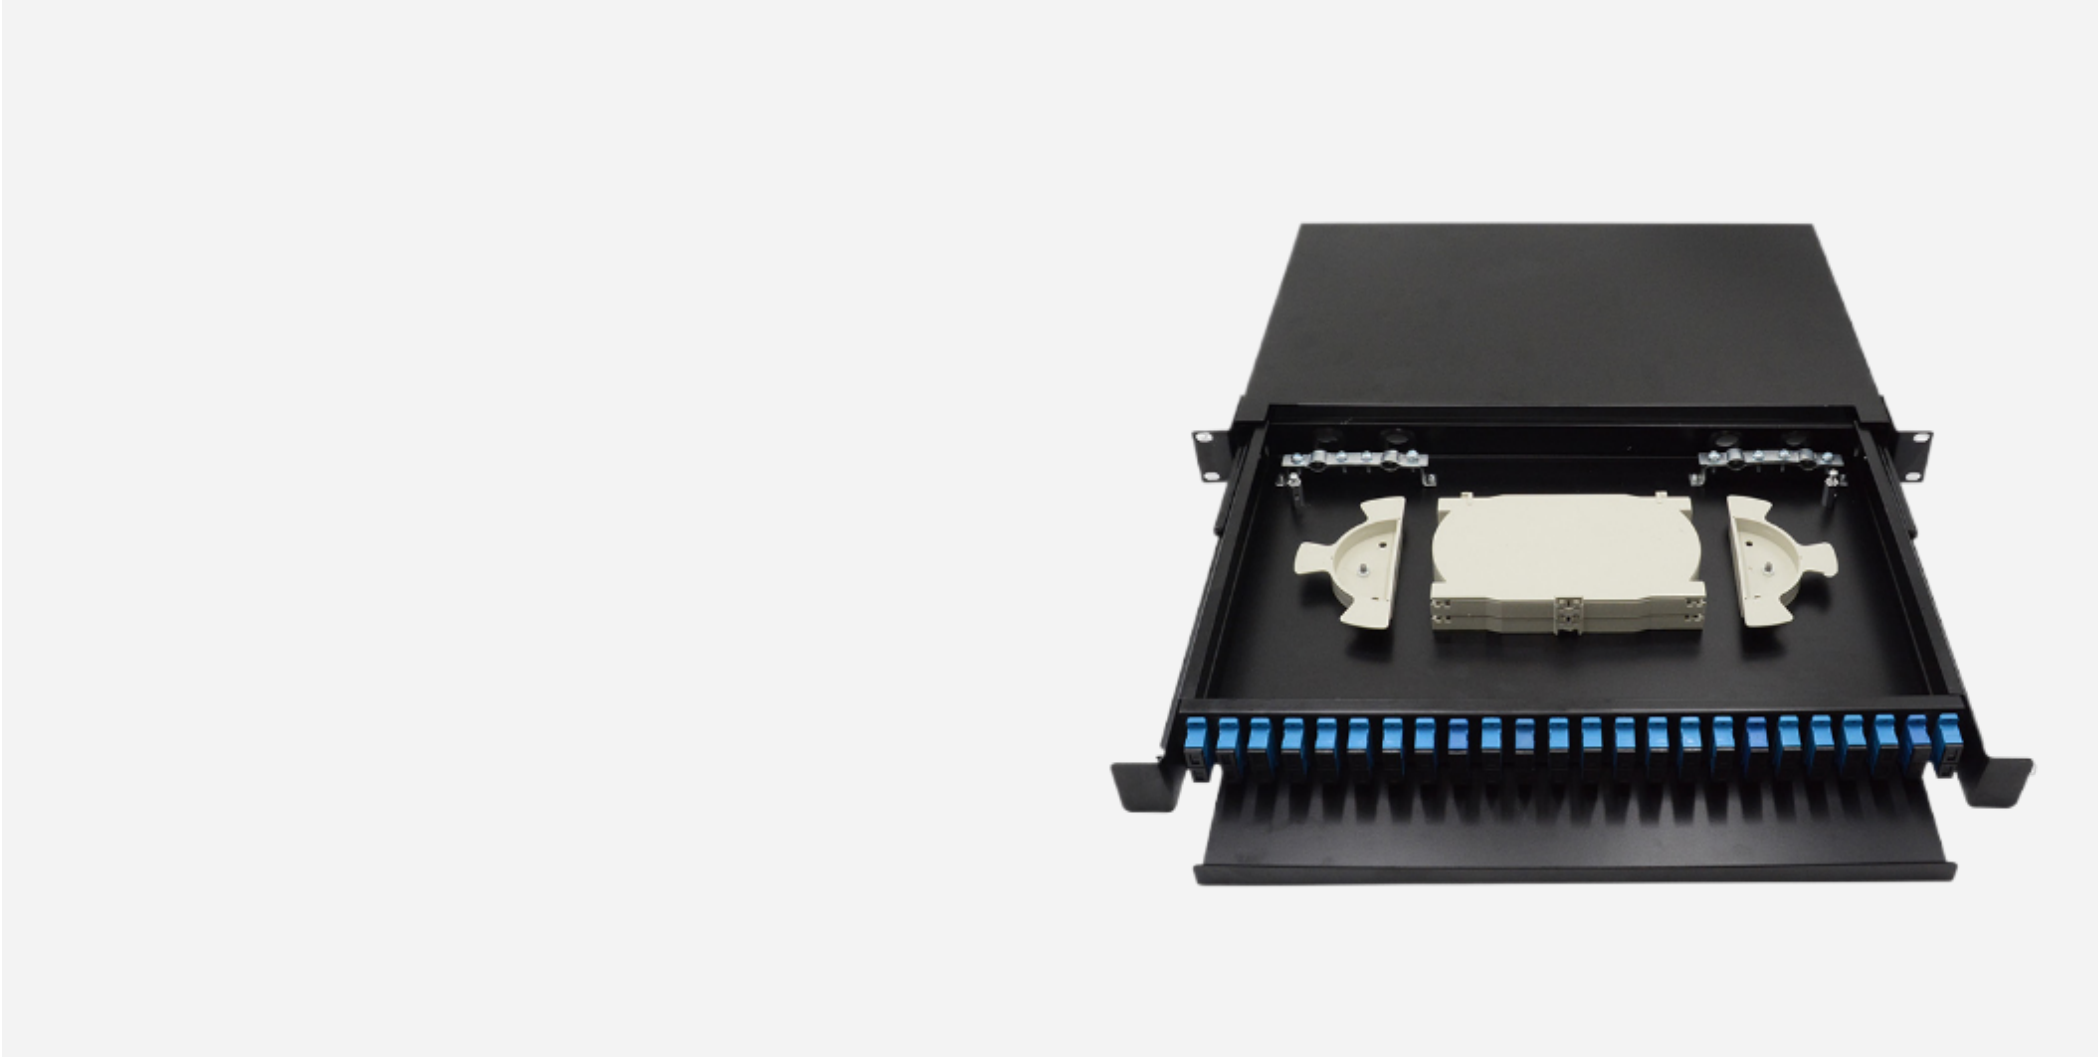

Detailed

Model	HFA-2401-SC02
External size	480*250*1U
Winding radius	≥40mm
Fiber capacity	48cores
Installing	Rack Mounted
Working Temperature	□25℃□□45℃
Atmosphere Pressure	70□106Kpa
Insulated Resistance	2×10MΩ/500V (DC□

