


HFA-SC11-BL Simplex Adapter SM

SC SM Simplex Adapter

Simplex and duplex panel cutouts

Panel clip for easy installation

Increase panel density and quick plug in installation

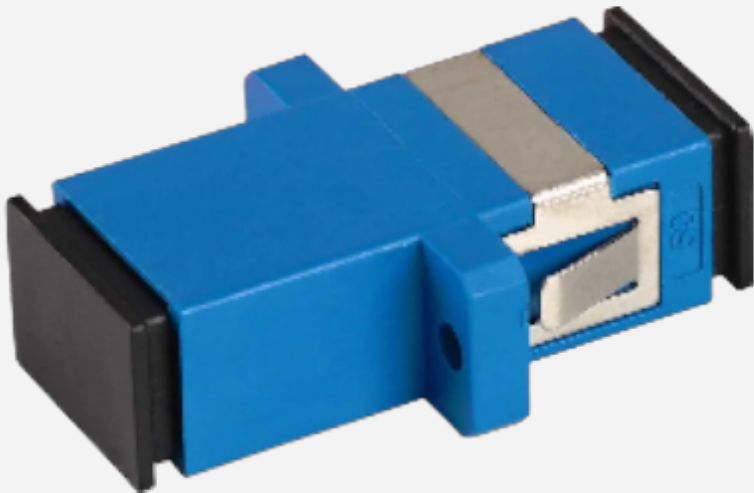

Model	CL·ASC-SMS
Meet bellcore	GR-326 standard
Insertion loss	SM<0.3dB, MM<0.5dB
Durability (500 Mating)	0.2dB Max Increase
Operating temperature	-40℃~85℃
Storage temperature	-40℃~85℃

