


Domofon DS-KV6103-PE1(C)

DS-KV6103-PE1(C) VIDEO INTERCOM HIKVISION

- Video intercom IP
- 2 MP camera
- Bidirectional audio
- Suitable for exterior IP65
- Surface mounting | PoE

Bağlantı tipi	IP
Cihaz	Zəng
Material	Metal

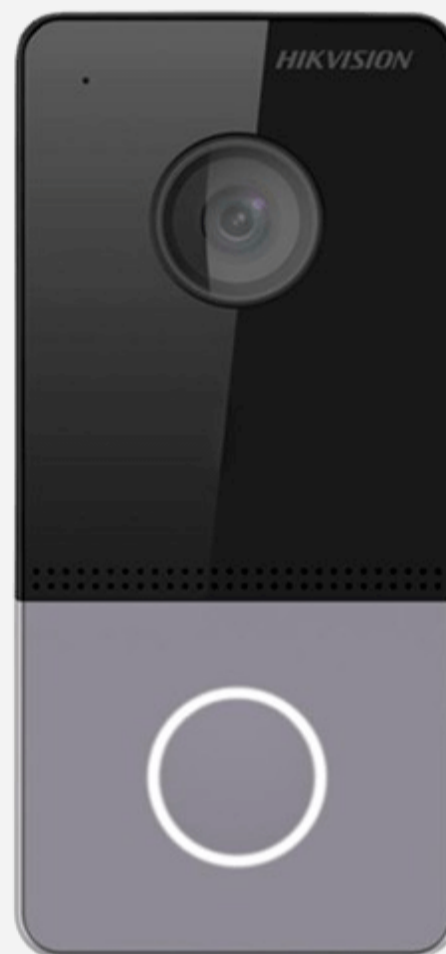

Ətraflı

System parameters

operating system	Embedded Linux OS
Inner memory	32 MB
Memory	256 MB
CPU	Built-in processor

Display options

Screen size	/
Control	/

Type	/
Permission	/

Video options

Lens	1
Permission	Main stream: 1920 × 1080p, 720p Sub stream: 704 × 576
Viewing angle	Horizontal: 131° Vertical: 78°
WDR	True WDR
Additional lighting	IR illumination
Video compression standard	H.264

Audio options

Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in speaker
Audio bitrate	64 Kbps
Improved sound quality	Noise and echo reduction
Volume adjustment	Customizable

Capacity

Number of users	/
Number of face images	/
Number of cards	/

Network settings

Communication protocol	TCP/IP, RSTP
Wired network	Auto 10 / 100 M Ethernet
Wi-Fi standard	/
Bluetooth	/

3G/4G standard	/
Device interfaces	
Alarm input	4
Network interface	1
Tamper	1
Exit button	1
RS-485	0
USB	0
Wiegand	0
TF card	0
Alarm output	0
Door lock indicator	1
Door contact input	1
Power interface	1

Basics

Button	1
Installation	Overhead installation
Indicator	0
Weight	200 g
Protection level	IP65
Working temperature	-40 to +53 °C
Operating humidity	From 10 to 95%
Dimensions	138 × 65 × 27 mm
Battery	/
terms of Use	Outside the premises
Power consumption	□ 10W

Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian
----------	--

Daytech.Az