


Monitor DS-D5050UC

DS-D5050UC-C SCREEN 4K MONITORS HIKVISION

- Designed for surveillance, high reliability and stability
- 50" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

Ölçü	50"
Görüntü imkanı	4K
Tezlik	60 Hz
Panel	İPS

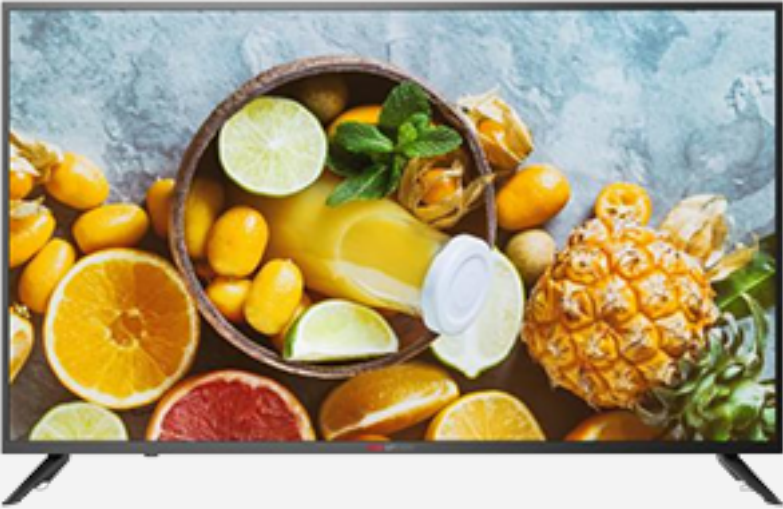

Ətraflı

Model		DS-D5050UC-C
Screen Size	50”	
Active DisplayArea	1095.84 (H)mm × 616.41 (V) mm	
Resolution	3840 × 2160@60 Hz	
Backlight	LED	
Pixel Pitch	0.2854 (H) mm × 0.2854(V) mm	
Brightness	300 cd/m²	
Viewing Angle	178° (H)/178° (V)	

Color Depth	8 bit
Contrast Ratio	5000:1
Response Time	8 ms
Refresh Rate	60 Hz
Haze	1%
Reliability	7 × 24 H
Color Gamut	72% NTSC
Video &Audio Input	HDMI 1.4 × 1, HDMI 2.0 × 1,VGA × 1, Audio in × 1
Video &Audio Output	Speaker (6 Ω 7 W) × 2
Data Transmission Interface	USB × 1
Power Supply	100 to 240VAC, 50/60 Hz
Power Consumption	≤ 110 W
Standby Consumption	≤ 0.5 W
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	20% to 80% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 90% RH (Non-Condensing)
Casing Material	Plastic
VESA	200 mm × 200 mm (4 × M6-30 mm)
Bezel Width	8.24 mm (top/left/right), 23.22mm (bottom)
Product Dimensions (W × H × D)	Without stand: 1116.32 mm × 648 mm × 87.2mm (43.95" × 25.51" × 3.43") With stand:1116.32 mm × 710.53 mm × 247.88mm (43.95" × 27.97" × 9.76")

Package Dimensions (W × H × D)	1420 mm ×800 mm × 160mm (55.91" × 31.50" × 6.30")
Net Weight	Without stand:10.41 kg (22.95lb.) With stand:10.65 kg (23.48lb.)
Gross Weight	Without stand: 13.5kg (29.76 lb.) With stand:13.8 kg (30.42lb.)
Packing List	Power cable × 1, remotecontrol × 1, user manual× 1, HDMI cable × 1, basebracket × 1