


Access Control ASI1201E

Support multiple cards (default IC card) (" -D" means ID EM card)
 Support card, password and combination
 TCP/IP to PC
 Wiegand or RS-485 interface to reader
 Door time out alarm, intrusion alarm, duress alarm and tamper alarm
 Anti-passback, multi-card open
 Water-proof design
 Support 128 efficient time and holiday schedules
 Watch dog function ensures device free from halting

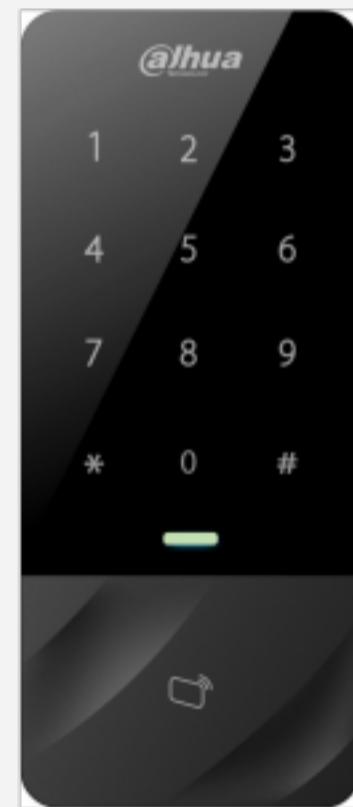

Detailed

Model	ASI1201E
Basic information	
Main Processor	32 bits
Memory	16 M
RTC	There are
Voice prompts	No
Beep sound	Buzzer

Keyboard	Sensitive touch keyboard with blue backlight
Input / Output ports	
Entrance	1 door sensor ,1 exit button
Exit	1 relay output (Door lock,)
Reader	1 Reader
Card Reader	
Reading format	13.56 MHz (Mifare)
Reading range	3-6 cm (max.)
Response time	<0.1s
Container	
Cardholders	30,000
Events	150,000
Function	
Managing users	Regular, VIP, Guest, patrol, blacklist, forced
Alarm function	Door lock alarm after waiting time has expired, security alarm, alarm system, burglar alarm
Setting up a period	Supports 128 groups for schedule, 128 groups for period, and 128 groups for holiday periods
Interface	
To the PC	RJ45(10 / 100M)
To the reader	Wiegand 26 / 34 RS485
Environment	
Operating temperature	-30°C ~ +60°C
Operating humidity	≤95%
Electrical properties	
Power supply	9-15DC / 200mA

General information

Sizes	62 x 23 x 142 mm
Weight	0.5 kg

Daytech.Az