
## DAYTECH.AZ

## **DMA60M Mikrafon 6 Zone**

DMA60M 6 Zones Remote Paging Station

- With independent zone switches for quick control of the 6 zones of the amplifier.
- With signal level indication function for more intuitive paging volume.
- With key lock function.
- One chime tone with a descending tone.
- With dual RJ45 interfaces for zone control and override functions. When cascading paging stations with a single port, the mixer amplifier can support up to 6 paging stations on a single port, with a maximum transmission distance of 300m. If only one paging station is connected to the mixer amplifier, the transmission distance can be up to 600m. The paging microphone does not require a separate power adapter and it is powered and receives audio transmission from the DMA series 6-zone amplifier. Note: Each host supports a maximum of 6 remote paging microphones.
- With 1-channel microphone volume adjustment.
- With one-touch all-zone paging function.
- With anti-fingerprint coating for the touch panel.

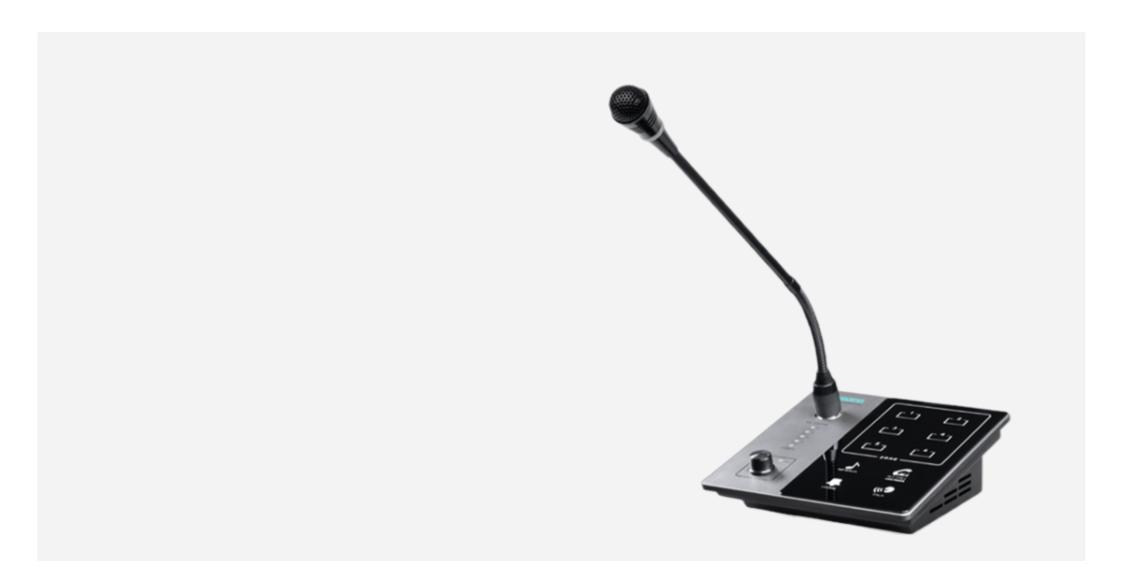

## **Ətraflı**

Model	DMA60M
Sensitivity	30±3mV
Frequency Response	200Hz-15KHz
S/N Ratio	≥70db
RJ45 Connector	RS485 communication protocol
Input Power	Powered by the host
Package Dimensions (H×W×D)	425×285×115mm
Machine Dimensions (H×W×D)	172×160×53mm
Gross Weight	1.6KG

Net Weight	0.89KG	
<u>Dayte</u>	CII.AZ	