
D&YTECH.&Z

DMA20 Remote Paging Station

DMA20 Remote Paging Station

- Zone-independent switches for quick control of six-zone switches of the amplifier.
- Featured by signal level indication, it has more intuitive paging sound pressure.
- With key lock function.
- 2 chime tones, chime up and chime down.
- With dual RJ45 ports. With zone control and override function. When cascading paging stations with a single port, this single port of the mixer amplifier can support up to 6 paging stations, with the maximum transmission distance of 300m. If only one paging station is connected to the mixer amplifier, the transmission distance can be up to 600m. The paging station does not require an independent power adapter, and is powered by the DMA series 6-zone amplifier for audio transmission. Note: Each host can support up to 6 remote paging microphones.
- One-channel hidden microphone volume knob.
- One key to page all zones.
- With anti-fingerprint coating for the touch panel.
- With priority function, with the ID6 as the highest-priority paging microphone.

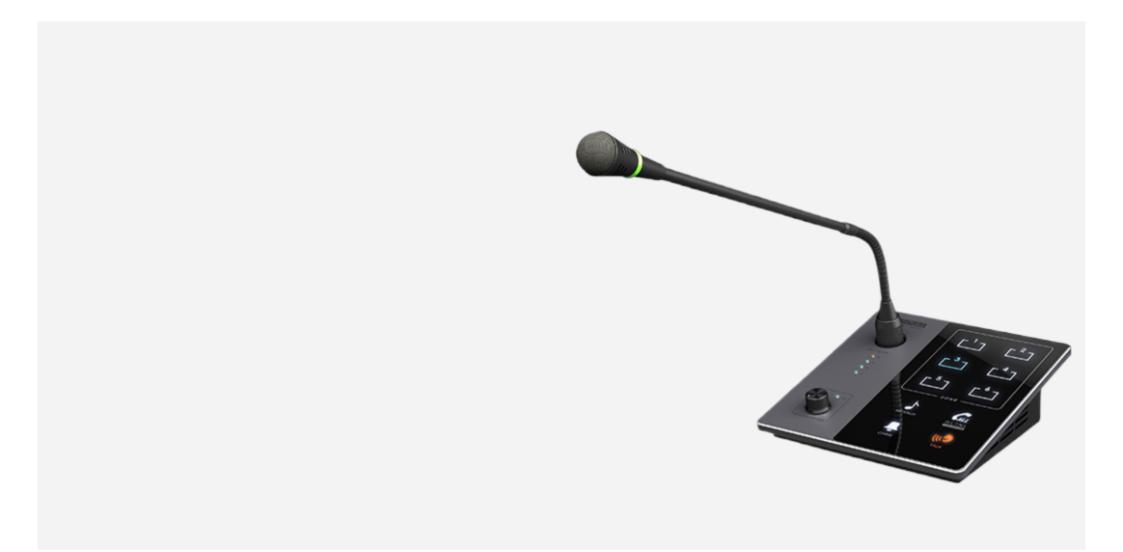

Ətraflı

Model	DMA20
Sensitivity	30±3mV
Frequency Response	200Hz-15KHz
SNR	≥70db
RJ45	RS485 communication protocol
Input Power	Host power supply
Package Dimensions (H×W×D mm)	425×285×115mm

Machine Dimensions (H×W×D mm)	172×160×53mm
Gross Weight	1.6KG
Net Weight	0.89KG

<u>Daytech.Az</u>